


1.1 Installation of SM3B, SM5B, SM5KB, SM5C, SM5KC

1.1.1 Start with a Factory Reset

Note: If the TV has not been set up before, the TV will power on in the "Install menu", shown below. The factory reset can then be skipped.

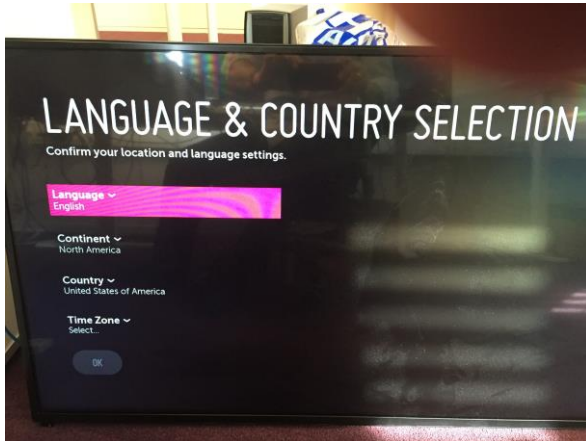

- TV has to be powered on
- Press and hold the **Settings** button on the LG remote for 5 seconds.
- When Toast (See picture, 3.3) is displayed, then press 0-0-0-0-OK"
- Select Signage setup – Factory Reset
- Do a normal installation of the screen

1.1.2 Screen settings

- Power On TV
- Set your language, Region and Country.
- Enter the Server menu
 - Press and hold the **Settings** button on the LG remote for 5 seconds.
 - When Toast (See picture, 3.3) is displayed, then press 8-0-8-0-OK"
- Application Launch Mode: Local
- Fully Qualified Domain name: On.
- Domain name: <https://ds.otrum.net/lq.zip>
- Auto Set: On
- Exit Server menu
- Press Settings button for settings menu
- Select Advanced - Network
- Select Network Type
 - Wired - Connect.
 - Wireless
 - Select SSID
 - Enter Password
- Return to main menu

- Enter General
- Select Timers
 - Set AutoPowerOff: OFF.
- Exit the menu
- Enter the Signage Setup menu
 - Press and hold the **Settings** button on the LG remote for 5 seconds.
 - When Toast (See picture, 3.3) is displayed, then press 0-0-0-0-OK”
- Go to Power Off Management
 - Set DPM: Off.
- Exit the Signage Setup menu
- Power Off Screen and Power it on again
- Application starts.

1.2 Nice to know

1.2.1 TV software version:

- Press Smart button on LG remote.
- Select Information

1.2.2 Changing network type

- Select Settings – Advanced - Network
- Select Network Type
 - Wired - Connect.
 - Wireless
 - Select SSID
 - Enter Password

1.2.3 Accessing Installation Menu

- Press and hold the **SETTINGS** button for 5 seconds.
- When Toast (The top right corner) is displayed, then press 0-0-0-0-OK

